

OR-TEC LO-FLO SCREEN

Self Cleaning Screw Screen

The OR-TEC OLS LO-FLO offers the advantages of high quality small orifice screening and compaction with low capital cost.

The LO-FLO is easy to install, operate and maintain. It simply fits inline on a pipe and is mounted using the provided flange connections.

The unit comes in a variety of sizes and can be used in applications requiring screening down to 2mm

Construction material

Stainless Steel 304 or 316

The screw can be constructed of 304 or 316 stainless steel or epoxy coated hardened carbon steel

Features

- Low Cost effective screening
- Mounts using supplied flange connections
- Stainless Steel Construction
- Robust and Simple Design
- Available with heat tracing and insulation

Applications

- WWTP Headworks
- Package Plants
- Food Processing and Packaging
- Industrial Waste application



PATENT PENDING


Capacity:

<u>Model</u>	<u>Perforation</u>	<u>Max. flowrate</u>
OLS2	2mm	50 gpm
OLS3	3mm	65 gpm
OLS5	5mm	90 gpm

14500 Industrial Ave. South
Maple Heights, OH 44137
P: 216-475-5225
F: 216-475-5229
info@or-tec.com

or-tec.com



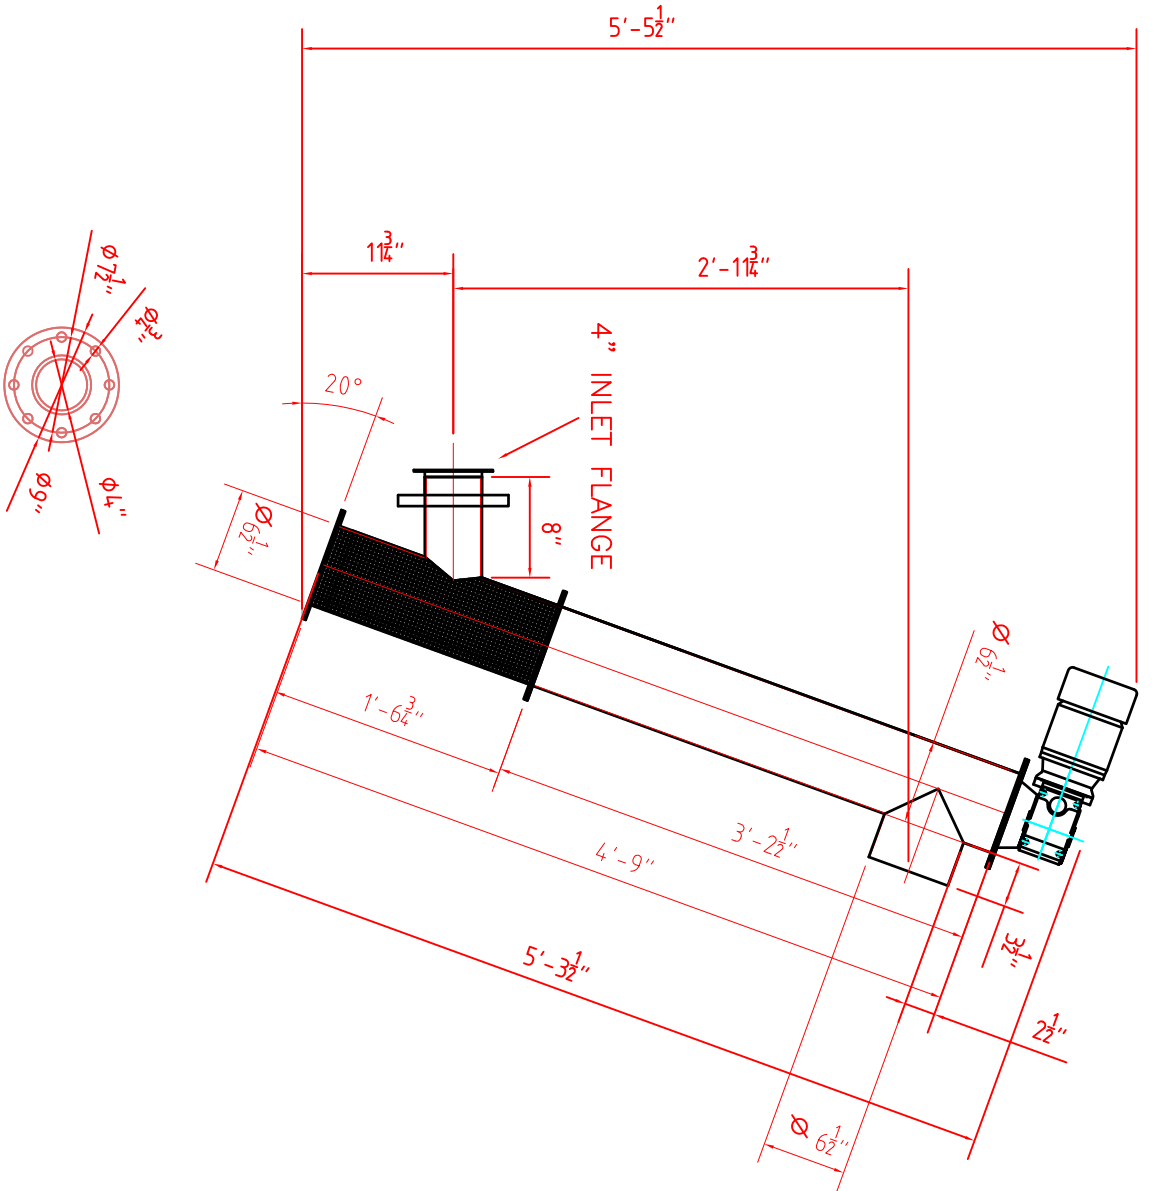

TITLE

OR-TEC
LO-FLO SCREEN

DRAWN BY

JF

DRAWN DATE

10/23/07

CHECKED BY

DKM

CHECKED DATE

10/24/07

OR-TEC
14500 SOUTH INDUSTRIAL RD
MAPLE HEIGHTS, OHIO USA
216-475-5225

INCORPORATED

SIZE

DWG NO.

A

OLS GA

REV.

XX

SCALE

XX

SHEET

XX

PROPRIETARY STATEMENT

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY, AND FURNISHED IN CONFIDENTIALLY AND NOT TO BE DISCLOSED, USED, OR DUPLICATED FOR ANY PURPOSE, OTHER THAN INTENDED, WITHOUT THE PRIOR WRITTEN PERMISSION OF OR-TEC INC. THIS LEGEND SHALL BE MARKED ON ANY REPRODUCTION HEREOF, IN WHOLE OR IN PART. RECEIPT OF THIS MATERIAL SHALL BE DEEMED TO BE AN ACCEPTANCE OF THE CONDITIONS SPECIFIED HEREIN.

BY

REV

DATE

DESCRIPTION