

# LO-FLO SCREEN

## SELF CLEANING SCREW SCREEN

The Or-Tec OLS Lo-Flo offers the advantages of high quality small orifice screening and compaction with low capital cost. The Lo-Flo is easy to install, operate, and maintain. It simply fits inline on a pipe and is mounted using the provided flange connections. The unit comes in a variety of sizes and can be used in applications requiring screening down to 2mm.

- Inline installation using the supplied flanged inlet
- Cost effective screening
- Low maintenance robust design
- Stainless Steel construction
- Maximum flow rate of 185 gpm
- Perforations from 2mm to 6mm available
- Endless bagger discharge (Optional)
- Insulated heat trace (Optional)



**EASY TO INSTALL  
& OPERATE**




**LOW  
MAINTENANCE**



**RAPID RETURN  
ON INVESTMENT**



# INLINE SCREENING MADE EASY

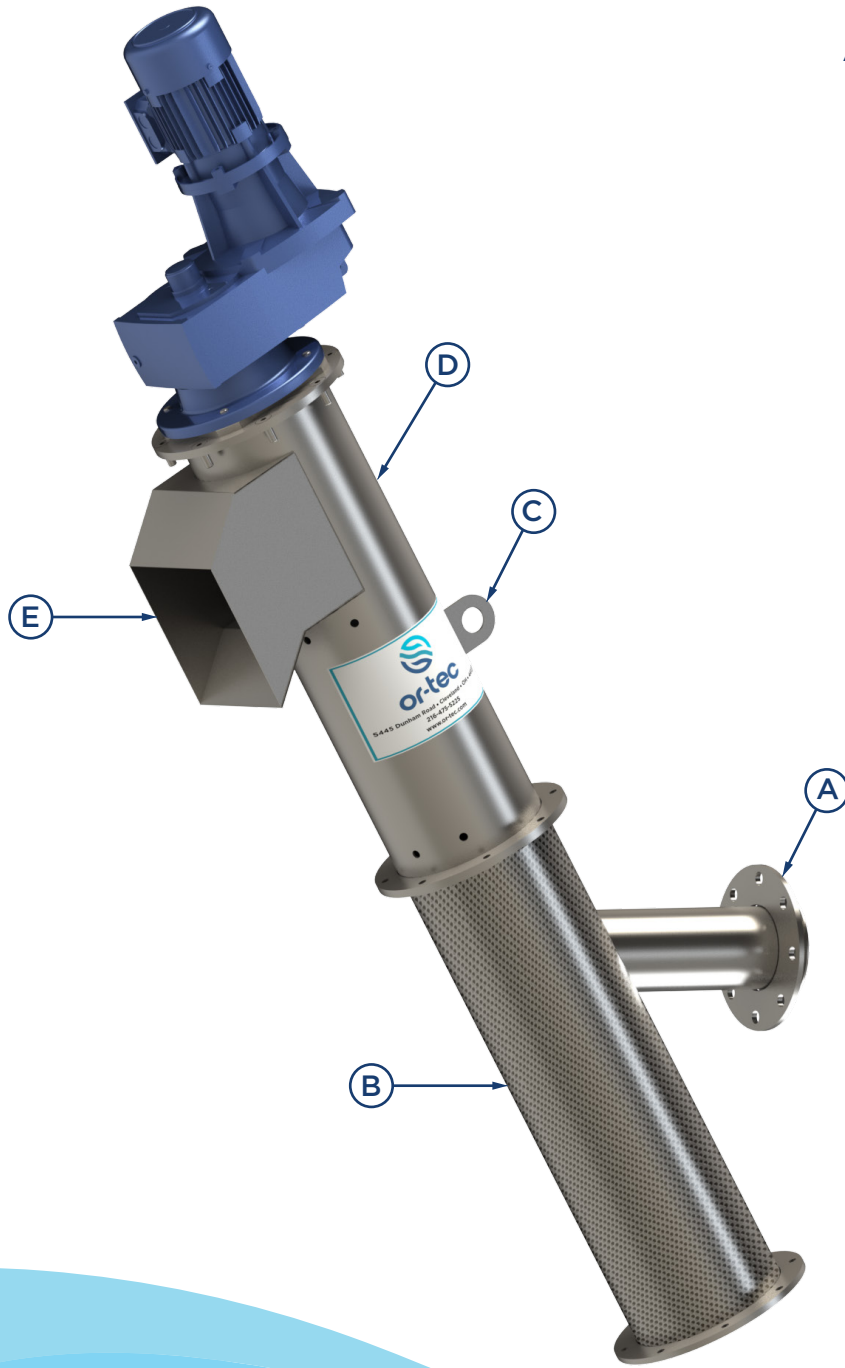

- A - Flanged Inlet
- B - Perforated Screen
- C - Lifting Hook
- D - Screen Body
- E - Screen Discharge

Applications
Waste Water Treatment Plant Headworks
Food Processing & Packaging
Paper Mills
Industrial Materials

Model	Capacity	
	Perforation Size	Max Flow Rate
OLS2	2mm	50 gpm
OLS3	3mm	65 gpm
OLS5	5mm	90 gpm

*Listed capacities are for reference only, contact Or-Tec for specific application information.*